
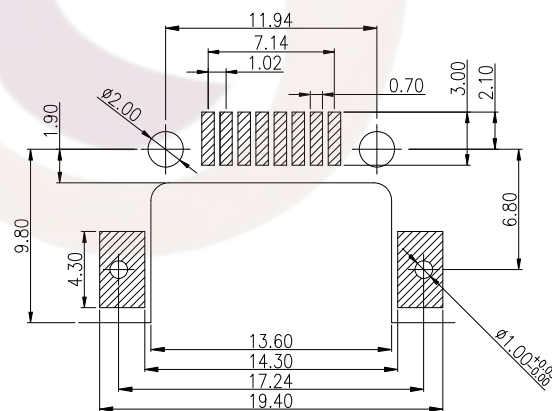
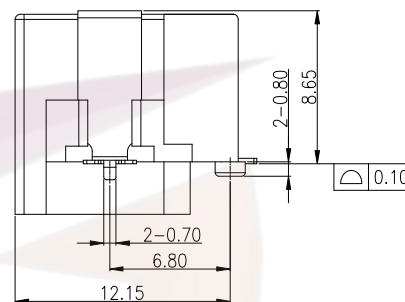
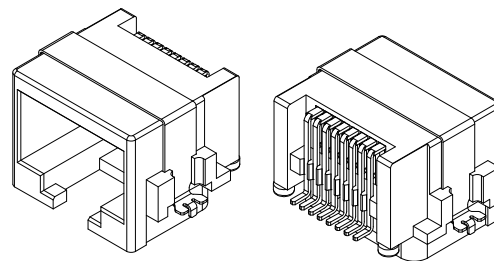
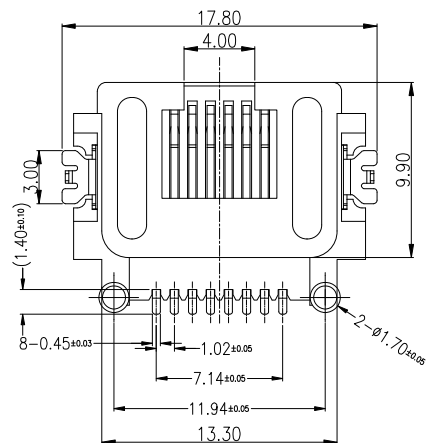
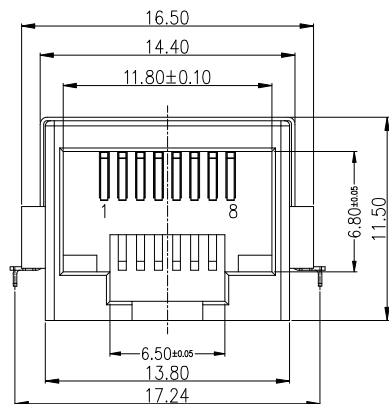


RoHS
Compliant

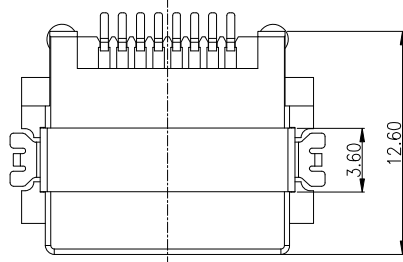

RECOMMENDED P.C.B. LAYOUT
GENERAL TOLERANCE: ±0.05

说明:

1. 材质:

胶芯: LCP, UL94V-0; COLOR: BLACK

端子: C5191

外壳: C2680

2. 电镀说明:

端子: 接触区域镀金G.F

焊锡区域镀锡

全部区域镍底

外壳: 表面镀镍

3. 性能说明:

1) 电压: 150V AC RMS.

2) 额定电流: 1.5A.

3) 接触电阻: 40mΩ Max.

4) 绝缘电阻: 500MΩ MIN.

5) 绝缘耐压: 1000V AC.

6) 工作温度: -40° C TO +80° C.

7) 耐久性: 500 Mating Cycles MIN.

PIN	Name	Description
1	TX+	Trancelive Data+(发信号+)
2	TX-	Trancelive Data-(发信号-)
3	RX+	Receive Data+(收信号+)
4	N/C	Not connected(空脚)
5	N/C	Not connected(空脚)
6	RX-	Receive Data-(收信号-)
7	N/C	Not connected(空脚)
8	N/C	Not connected(空脚)

Guangdong Tengjun Electronic Technology Co., Ltd

Website:

<https://www.tengjunconn.com>

TEL:

0769-23323869



PART NAME RJ45 沉板8.6 半包 SMT

PART NO. TJDBBB168727C086

TOLERANCE UNLESS
OTHERWISE SPECIFIED:

X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

SCALE

SHEET

REV A0

CHECK:

Chen

DATE:

2019.11.12

1:1

1/2

SIZE: A4

APPROVAL:


Yuan

DATE:

2019.11.12



☐

RoHS
Compliant

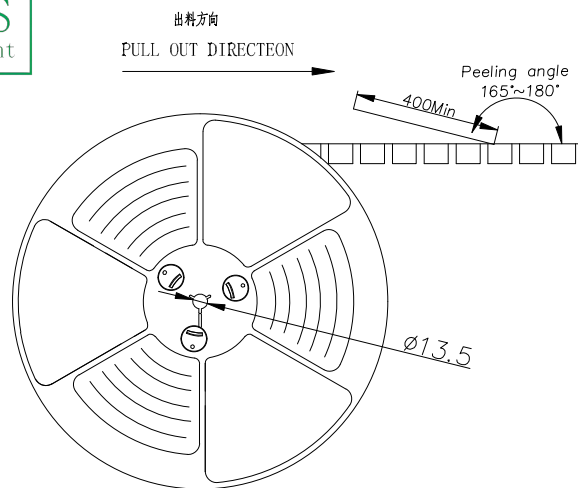


NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

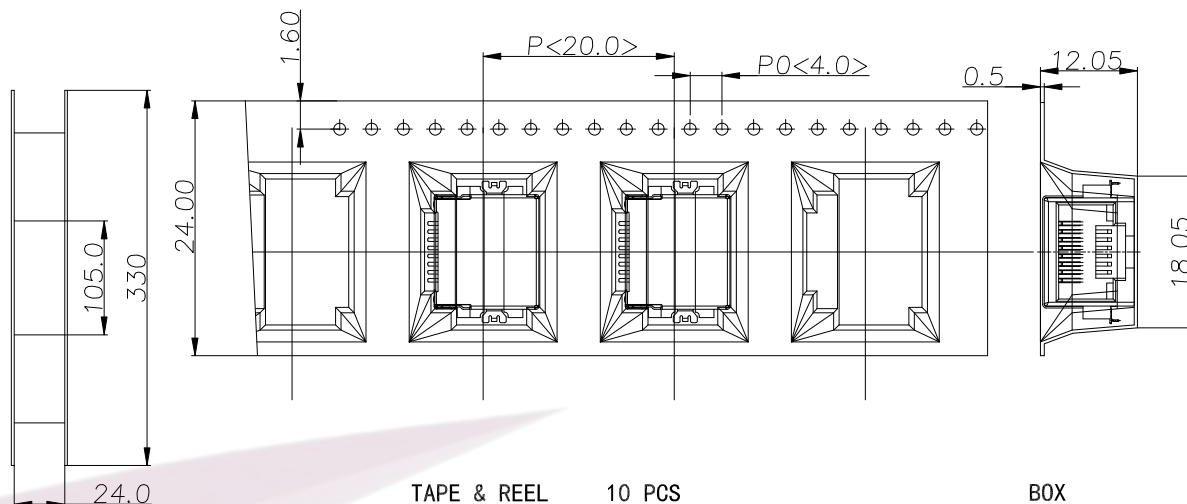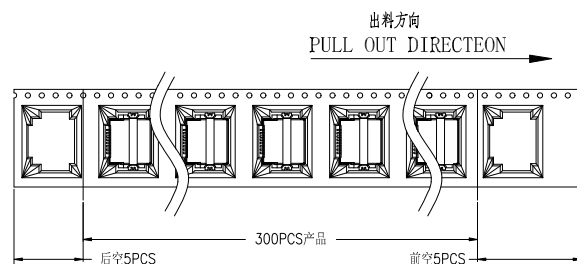


TAPE & REEL 10 PCS
1 REEL
= 300 PCS



BOX

DIMENSIONS:
33.5X33.5X30.5

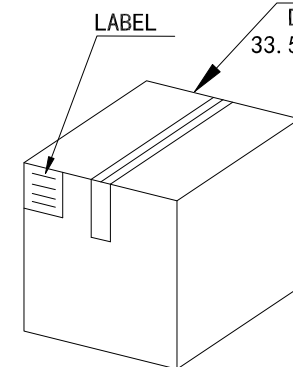

1 CARTON
=10 REELS
=3000 PCS

2. 上帶 剝力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)

出貨運輸過程中一定注意:

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:

卷帶在運輸過程中不能散開

PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

Guangdong Tengjun Electronic Technology Co., Ltd

Website:

<https://www.tengjunconn.com>

TEL:

0769-23323869



PART NAME RJ45 沉板8.6 半包 SMT

PART NO. TJDBBB168727C086

TOLERANCE UNLESS
OTHERWISE SPECIFIED:

X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

SCALE

SHEET

REV A0

CHECK:

Chen

DATE:

2019.11.12

1:1

2/2

SIZE: A4

APPROVAL:

Yuan

DATE:

2019.11.12

☐