
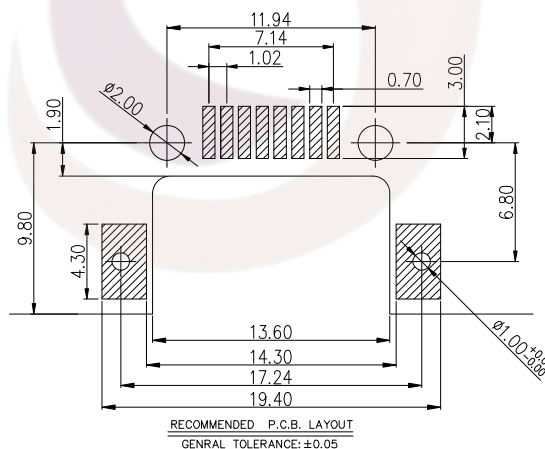
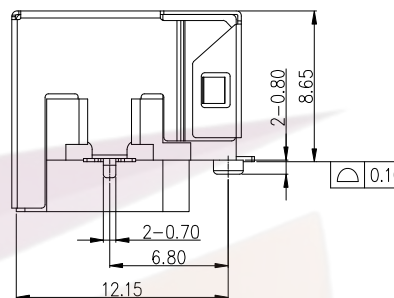
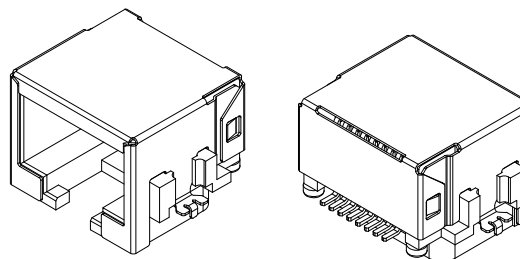
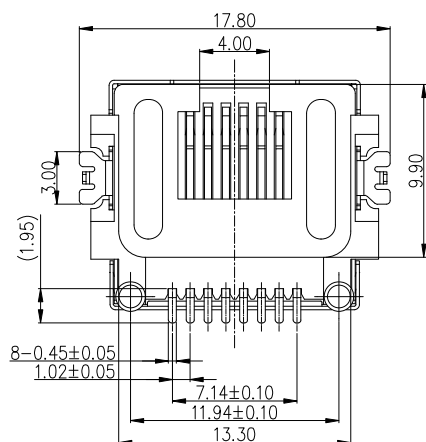
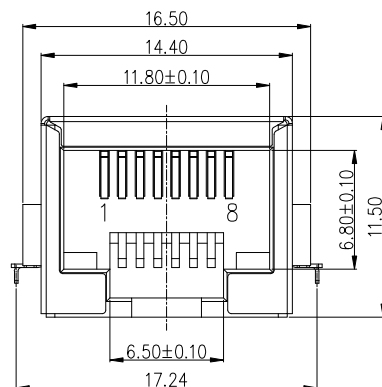


RoHS
Compliant

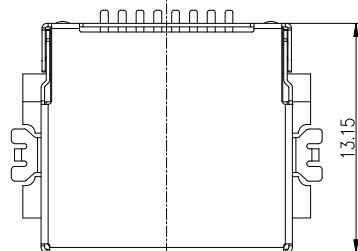

RECOMMENDED P.C.B. LAYOUT
GENERAL TOLERANCE: ±0.05

说明:

1. 材质:
胶芯: LCP, UL94V-0; COLOR: BLACK
端子: C5191
外壳: C2680
2. 电镀说明:
端子: 接触区域镀金G.F
焊锡区域镀锡
全部区域镀底
外壳: 表面镀镍
3. 性能说明:
1) 电压: 150V AC RMS.
2) 额定电流: 1.5A.
3) 接触电阻: 40mΩ Max.
4) 绝缘电阻: 500MΩ MIN.
5) 绝缘耐压: 1000V AC.
6) 工作温度: -40° C TO +80° C.
7) 耐久性: 500 Mating Cycles MIN.

PIN	Name	Description
1	TX+	Transceive Data+(发信号+)
2	TX-	Transceive Data-(发信号-)
3	RX+	Receive Data+(收信号+)
4	N/C	Not connected(空脚)
5	N/C	Not connected(空脚)
6	RX-	Receive Data-(收信号-)
7	N/C	Not connected(空脚)
8	N/C	Not connected(空脚)

Guangdong Tengjun Electronic Technology Co., Ltd

Website:

<https://www.tengjunconn.com>

TEL:

0769-23323869



PART NAME

RJ45沉板8.6全包 SMT

PART NO.

TJDBQB168778C086

TOLERANCE UNLESS
OTHERWISE SPECIFIED:

X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

SCALE

SHEET

REV A0

CHECK:

Chen

DATE:

2019.11.12

1:1

1/2

SIZE: A4


APPROVAL:

Yuan

DATE:



2019.11.12

1:1

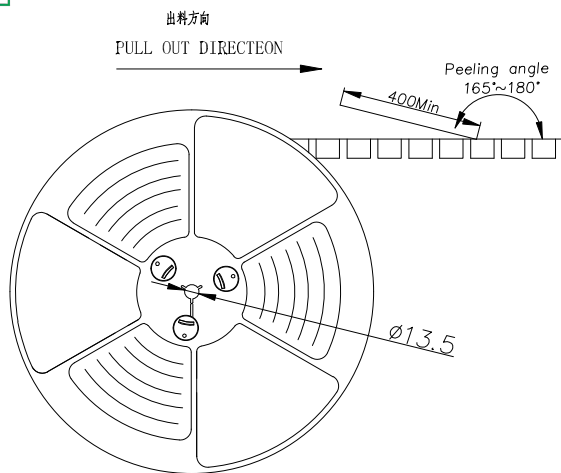


NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

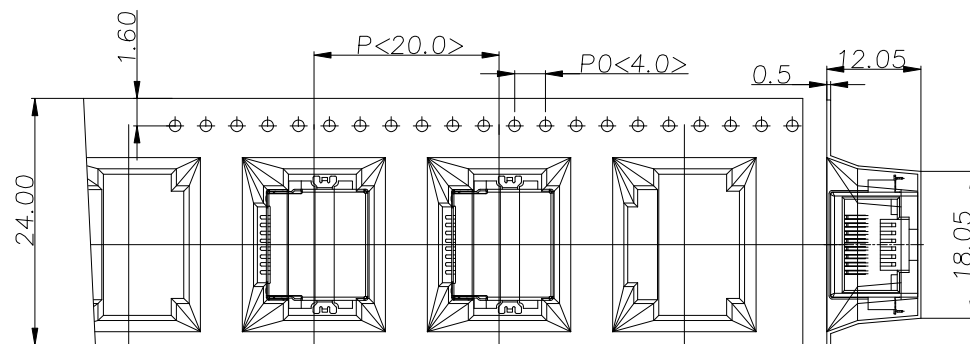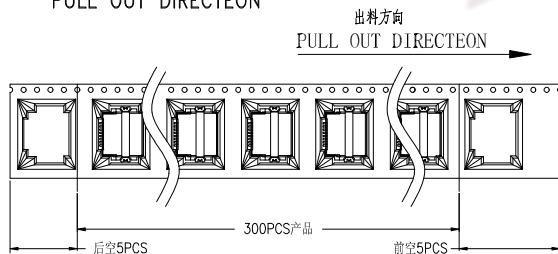

TAPE & REEL 10 PCS


1 REEL
= 300 PCS



BOX

DIMENSIONS:
33.5X33.5X30.5

LABEL



1 CARTON
=10 REELS
=3000 PCS

2. 上帶 剝力為: 0.1~1.3N(10.2gf~130gf)

PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2gf~130gf)

出貨運輸過程中一定注意:

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:

卷帶在運輸過程中不能截開

PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

Guangdong Tengjun Electronic Technology Co., Ltd

Website:

<https://www.tengjunconn.com>

TEL:

0769-23323869



PART NAME

RJ45沉板8.6全包 SMT

PART NO.

TJDBQB168778C086

TOLERANCE UNLESS
OTHERWISE SPECIFIED:

X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

SCALE

SHEET

REV A0

CHECK:

Chen

DATE:

2019.11.12

1:1

2/2

SIZE: A4

APPROVAL:

Yuan

DATE:

2019.11.12

☐